



# TSM40


SÉRIE

**CENTRÍFUGA  
SUBMERSA**

PARA POÇOS Ø MIN.4"



**ROTOR**   
 DIÂMETRO **78.75** mm   
 LARGURA **7.60** mm   
 RECALQUE **2"** BSP   
 ROTAÇÃO **3500** rpm   
 FREQUÊNCIA **60** Hz   
 DIÂMETRO EXTERNO **97** mm   
 ESTÁGIOS **MÍN. 5**  
**MÁX. 21**

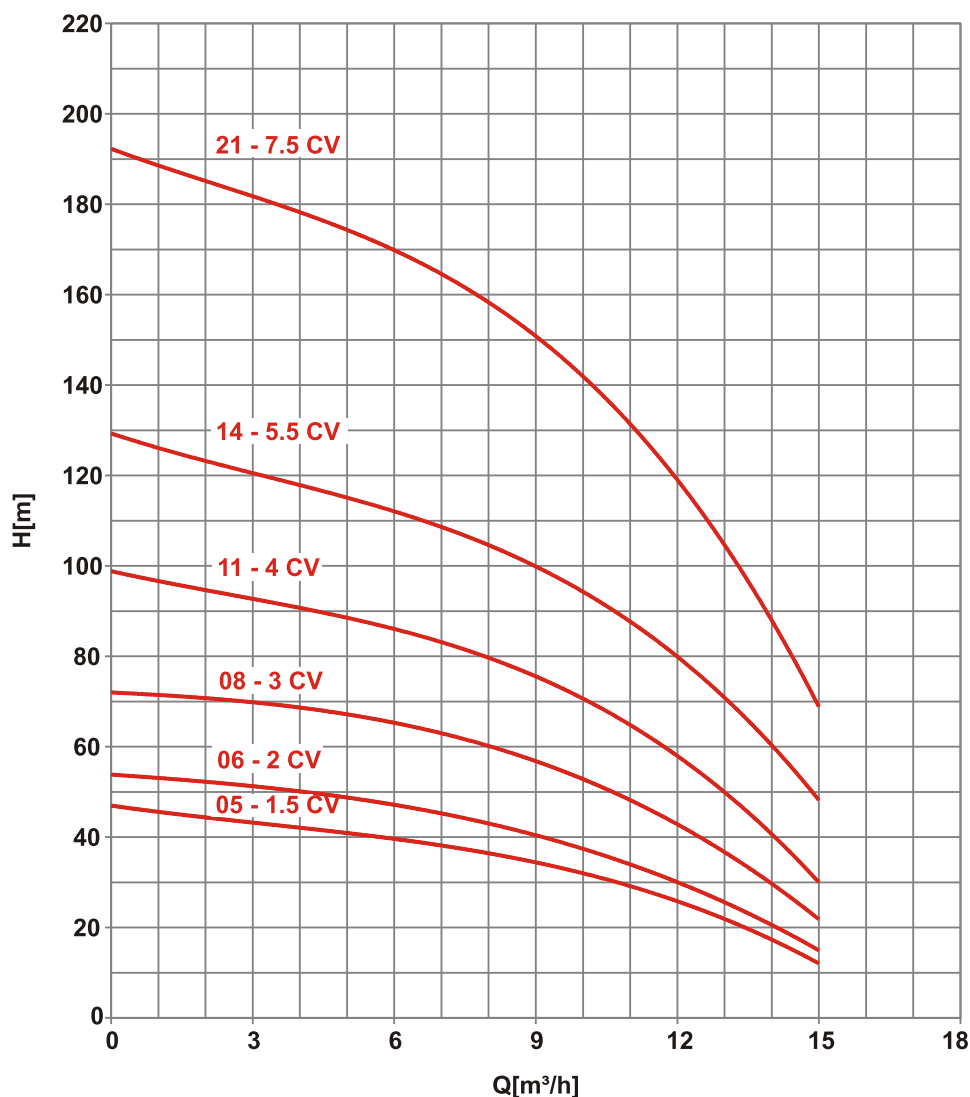

MODELO	CV	ESTÁGIOS	RECALQUE	ALTURA MÁXIMA (Metros)	VAZÃO (Metros Cúbicos por Hora)				
					3,0	6,0	9,0	12,0	15,0
TSM-4005	1,5	5	2"	47	43	39	34	26	13
TSM-4006	2,0	6	2"	54	50,6	47	40	30	17
TSM-4008	3,0	8	2"	72	70	64,5	58	43	22
TSM-4011	4,0	11	2"	99	92	87	75	58	30
TSM-4014	5,5	14	2"	129	121,5	112	100	80,3	48
TSM-4021	7,5	21	2"	192	182,5	169,5	150	120	68,5